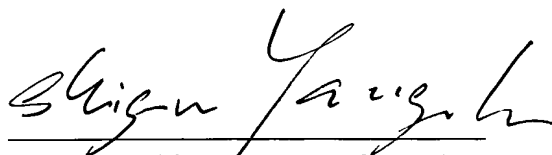


## CERTIFICATION

I, Shigeru Yanagihara, of Yanagihara & Associates, 310, Toranomom Garden 10-4, Toranomom 3-Chome, Minato-Ku, Tokyo 105-0001, Japan, hereby certify that the following is a true and correct translation, to the best of my knowledge and belief, filed in respect of Japanese Patent Application No. 2000-244026 on 7th August 2000.

Place        Tokyo

Date         November 30, 2005

  
Shigeru YANAGIHARA



Toku 2000-244026

**【Designation of the Document】** Patent Application

**【Docket Number】** Y0A647

**【Date of Filing】** 7th August 2000

**【Addressee】** The Commissioner  
of the Patent Office

**【International Classification of Patent】** G01N 21/35

**【Title of the Invention】** METHOD OF NEAR-INFRARED ABSORPTION  
ANALYSIS AND METHOD FOR CONTROLLING  
PRODUCTION PROCESS

**【Number of Claims】** 12

**【Inventor】**  
**【Address or Residence】** c/o MITSUI CHEMICALS, INC.  
1-2, Waki 6-Chome, Waki-Cho, Kuga-Gun,  
Yamaguchi, Japan

**【Name】** Toshiharu MITANI

**【Inventor】**  
**【Address or Residence】** c/o MITSUI CHEMICALS, INC.  
1-2, Waki 6-Chome, Waki-Cho, Kuga-Gun,  
Yamaguchi, Japan

**【Name】** Masami TSURUOKA

**【Inventor】**  
**【Address or Residence】** c/o MITSUI CHEMICALS, INC.  
1-2, Waki 6-Chome, Waki-Cho, Kuga-Gun,  
Yamaguchi, Japan

**【Name】** Yasuo MIYOSHI

**【Applicant】**

**【Identification Number】** 000005887  
**【Name or Designation】** MITSUI CHEMICALS, INC.

**【Authorized Representative】**

**【Identification Number】** 100067839  
**【Patent Attorney】**  
**【Name or Designation】** Shigeru YANAGIHARA  
**【Telephone Number】** 03-3436-4700

**【Notes for Application Fee】**

**【Preliminary Payment**  
**Register Number】** 004477  
**【Amount of Payment】** 21000

**【List of Submitted  
Materials】**

<b>【Name of Material】</b>	Specification	1
<b>【Name of Material】</b>	Drawing	1
<b>【Name of Material】</b>	Abstract	1
<b>【Number of General Power of Attorney】</b>	0010773	

**【Demand of Proof】** Demanded



Tokugan 2000-244026

(1)

---

[ DESIGNATION OF THE DOCUMENT ]

SPECIFICATION

[ TITLE OF THE INVENTION ]

METHOD OF NEAR-INFRARED ABSORPTION ANALYSIS  
AND METHOD FOR CONTROLLING PRODUCTION PROCESS

[ PATENT CLAIMS ]

[ Claim 1 ] A method of near-infrared absorption analysis, comprising

taking an absorbance spectrum for each of a plurality of standard samples in an analysis range including near-infrared region,

constructing a data base by calculating standard deviations and the average intensity of the standard samples (standard average intensity) in respect of each wave length selected at intervals from the spectrum included in the said analysis range,

taking an absorbance spectrum in the said analysis range for each analysis sample,

comparing the resulting absorbance spectrum with the data base, and

estimating deviation (analysis deviation) of the intensity of the absorbance spectrum of each of the analysis samples (analysis intensity) at each of the said selected wave lengths from the standard average intensity.

[ Claim 2 ] The method as claimed in claim 1, wherein the deviations (analysis deviations) of the analysis intensities from the standard average intensity are discriminated as to whether or not they are within the tolerance limit determined based on the

---

standard deviations given in the data base for the standard samples.

[ Claim 3 ] The method as claimed in claim 1 or 2, wherein the said analysis range is from 800 nm to 2,500 nm.

[ Claim 4 ] The method as claimed in claim 3, wherein the said analysis range is from 400 nm to 2,500 nm.

[ Claim 5 ] The method as claimed in any one of claims 1 to 4, wherein the selected wave lengths stand each other at a distance of 10 nm or less.

[ Claim 6 ] The method as claimed in claim 5, wherein the selected wave lengths stand each other at a distance of 2 nm or less.

[ Claim 7 ] The method as claimed in any one of claims 1 to 6, wherein the absorbance spectrum is processed by differentiation.

[ Claim 8 ] The method as claimed in claim 7, wherein the absorbance spectrum is processed by building up the second order derivative thereof.

[ Claim 9 ] The method as claimed in any one of claims 1 to 8, wherein the data base is constructed from a plurality of standard samples of a plurality of kinds, by calculating the standard average intensity and standard deviations for each kind.

[ Claim 10 ] The method as claimed in any one of claims 1 to 9, wherein absorbance spectra are obtained for a plurality of the analysis samples and estimating the deviations of average intensities of the analysis samples (analysis average intensity) at the selected

---

wave lengths from the standard average intensity.

[Claim 11] A method for controlling production process, comprising

performing analyses of the analysis samples obtained from a production process, by the method as claimed in any one of claims 1 to 10,

comparing, when the absorbance spectrum includes wave length(s) at which the analysis deviation of the absorbance spectrum of the analysis sample is outside a tolerance limit, the wave length showing the analysis deviation outside the tolerance limit with production informations given preliminarily in the data base to thereby obtain control data and

performing the control so as to obtain production product within the tolerance limit by inputting the said control data to the production process step.

[Claim 12] The method as claimed in claim 11, wherein the production informations stored in the data base are those of the component material corresponding to the said selected wave lengths.

[ DETAILED DESCRIPTION OF THE INVENTION ]

[ 0001]

[ TECHNICAL FIELD OF THE INVENTION]

The present invention relates to a method of near-infrared absorption analysis (near-infrared spectrochemical analysis) for discriminating whether or not an analysis sample is within the tolerance limit for a rated product as well as to a method for controlling production process by utilizing the

above-mentioned method.

[ 0002]

[ PRIOR ART ]

For analyzing chemical substances, foods, agricultural products and so on, near-infrared absorptiometric analysis has been in practical application. Using the resulting analytical data for the components, characteristic properties and so on, control of production process may be realized. In the field of chemical industry, it has been proposed to realize control of operation of a production plant for chemical product by using data of near-infrared absorptiometric analyses of the raw materials, solvents, moisture content, intermediate products, final product, by-products and so on. In conventional near-infrared absorptiometric analysis, a near-infrared absorbance spectrum in a specific range is taken and, based on a combination of absorbances at specific wave lengths included in this spectrum, the components, characteristic properties and so on to be determined are calculated by having resort to a preliminarily prepared calibration curve, in order to derive analysis values (predicted values).

[ 0003]

By a near-infrared absorptiometry, a definite absorbance spectrum can be obtained steadily for a specific component under a definite observation condition and with specific material properties, while the absorbance spectrum may subject to deviation in the height or position of absorbance peak due to alteration

---

in the condition, such as concentration, particle size and temperature, or may vary due to interference with the absorption peaks for co-existing extraneous components. From a near-infrared absorbance spectrum, which includes, as mentioned above, informations for a plurality of constituent components, a calibration curve (correlation equation) for each component is prepared by means of a statistic technique, on the basis of which analysis is attained.

[ 0004]

For the preparation of the calibration curve, samples each having a definite composition and definite characteristic features are taken and are subjected to conventional chemical analysis and to a near-infrared absorptiometric analysis, whereupon a correlation equation is derived by means of a statistic technique, such as a multiple linear regression analysis (MLR) or a partial least-squares method (PLS). A near-infrared absorbance spectrum includes a number of absorbance peaks, so that use of too many descriptive variables (assigned wave lengths) may result in reduction in the reliability due to overfitting of calibration curves. For this reason, there are used in general 2 to 5 descriptive variables for MLR and about ten descriptive variables for PLS.

[ 0005]

It is a common practice for detecting the component concentrations and material properties using a wave length range of near-infrared region from 800 to 2,500 nm, that predicted values are estimated by



selecting near-infrared spectral wave lengths each having a correlation with the results determined using conventional analysis apparatus or conventional material property observing apparatus under preparation of a correlation equation to obtain a predicted value of near-infrared analysis. However, the so-estimated predicted values represent only informations derived using the calibration curve prepared from values for limited wave lengths of numbers of 2 - 5 or about 10 selected within the wide near-infrared region of from 800 nm to 2,500 nm. Therefore, it is difficult by such a common practice to grasp the entire aspects or a delicate variation of a sample (or a product) and such a practice is not effective, in particular, in the case where preparation of calibration curve is not possible. Namely, it is difficult to prepare a calibration curve in the following cases:

(1) Variation of the parameter to be detected, such as concentration or material properties, is little.

(2) Temporal change of the sample occurs.

[ 0006]

[ SUBJECT TO BE SOLVED BY THE INVENTION ]

The object of the present invention is to provide a method of near-infrared absorption analysis capable of performing the analysis in a simple manner at a higher accuracy without using calibration curve.

Another object of the present invention is to provide a method of controlling production process capable of controlling the production process steps in a simple manner at a higher accuracy based on the

---

analysis results obtained as above.

[ 0007]

[ MEANS FOR SOLVING THE SUBJECT ]

The present invention relates to the following method for controlling production process:

(1) A method of near-infrared absorption analysis, comprising

taking an absorbance spectrum for each of a plurality of standard samples in an analysis range including near-infrared region,

constructing a data base by calculating standard deviations and the average intensity of the standard samples (standard average intensity) in respect of each wave length selected at intervals from the spectrum included in the said analysis range,

taking an absorbance spectrum in the said analysis range for each analysis sample,

comparing the resulting absorbance spectrum with the data base, and

estimating deviation (analysis deviation) of the intensity of the absorbance spectrum of each of the analysis samples (analysis intensity) at each of the said selected wave lengths from the standard average intensity.

(2) The method as defined in the above (1), wherein the deviations (analysis deviations) of the analysis intensities from the standard average intensity are discriminated as to whether or not they are within the tolerance limit determined based on the standard deviations given in the data base for the standard

---

samples.

(3) The method as defined in the above (1) or (2), wherein the said analysis range is from 800 nm to 2,500 nm.

(4) The method as defined in the above (3), wherein the said analysis range is from 400 nm to 2,500 nm.

(5) The method as defined in any one of the above (1) to (4), wherein the selected wave lengths stand each other at a distance of 10 nm or less.

(6) The method as defined in the above (5), wherein the selected wave lengths stand each other at a distance of 2 nm or less.

(7) The method as defined in any one of the above (1) to (6), wherein the absorbance spectrum is processed by differentiation.

(8) The method as defined in the above (7), wherein the absorbance spectrum is processed by building up the second derivative thereof.

(9) The method as defined in any one of the above (1) to (8), wherein the data base is constructed from a plurality of standard samples of a plurality of kinds, by calculating the standard average intensity and standard deviations for each kind.

(10) The method as defined in any one of the above (1) to (9), wherein absorbance spectra are obtained for a plurality of the analysis samples and estimating the deviations of average intensities of the analysis samples (analysis average intensity) at the selected wave lengths from the standard average intensity.

(11) A method for controlling production process,

---

comprising

performing analyses of the analysis samples obtained from a production process, by the method as defined in any one of the above (1) to (10),

comparing, when the absorbance spectrum includes wave length(s) at which the analysis deviation of the absorbance spectrum of the analysis sample is outside a tolerance limit, the wave length showing the analysis deviation outside the tolerance limit with production informations given preliminarily in the data base to thereby obtain control data and

performing the control so as to obtain production product within the tolerance limit by inputting the said control data to the production process step.

(12) The method as defined in the above (11), wherein the production informations stored in the data base are those of the component material corresponding to the said selected wave lengths.

[ 0008]

By the analysis technique by near-infrared absorptiometry according to the present invention, absorbance spectrum is taken in an analysis range including near-infrared region from a plurality of standard samples. The absorbance spectrum of standard sample is taken for each of a plurality of samples for each kind which have been judged to be rated product. Here, the kind means that sorted by the difference in the components, material properties and so on determined for each grade of manufacture. Inaccordance with such

difference, the production condition varies also. According to the present invention, it is favorable to collect a plurality of standard samples for each kind and to take an absorbance spectrum for each of them. While a more accurate analysis can be attained as the number of samples increases, a number of samples of about 20 to 30 for each kind may be practical in general.

[ 0009]

The analysis range in near-infrared region lies from 800 to 2,400 nm, wherein the range may be comprised of a part thereof or may comprise further a visible light region and/or an infrared region in addition to the near-infrared region. When it comprises visible light region and far infrared region, it may range from 400 to 2,400 nm. While the near-infrared region includes informations concerning the components and the material properties of the sample, the visible light region includes informations concerning colors thereof, so that it is preferable that the analysis range includes a visible light region when analysis and control concerning the color of the product are performed. While the absorbance spectrum may favorably be taken by observing the absorbance intensity continuously for the analysis range mentioned above, it is also permissible to prepare an absorbance spectrum by observing the absorbance intensities at selected wave lengths, as described in the following.

[ 0010]

According to the present invention, average

---

intensity (standard average intensity) and standard deviations for selected wave lengths selected at intervals from the absorbance spectrum obtained as above are calculated, from which a data base is constructed. The interval of the selected wave lengths may be 10 nm or less, preferably 2 nm or less. While the selected wave lengths may favorably be selected among all over the analysis range, it is permissible, when unnecessary part is present, to exclude such a part. The standard average intensity is determined preferably by averaging algebraically the intensities of the absorbance spectra of standard samples at each selected wave length for each kind and the standard deviations are determined favorably by calculation from the deviation of each intensity from the standard average intensity.

[ 0011]

While the calculations of the standard average intensity and of the standard deviations may be carried out directly for the original spectrum obtained from the standard specification, it is preferable to carry out the calculation from differentiation-treated, in particular, second order differentiation-treated absorbance spectrum. The baseline of a near-infrared spectrum chart tends to rise up on the side of longer wave length due to influences by moisture content and so on and exhibits overlaps of spectral peaks. In contrast, the differentiation-treated spectrum has flat horizontal baseline. In particular, in the second order derivative of the spectrum, the peaks are inverted with sharpened reproduction of lower peaks and the

overlapped peaks become separated in a favorite manner. The average intensity and the standard deviations are determined using such differentiation-treated spectrum and are inputted into a computer to construct a data base. Such data base is built up for each kind of the standard samples.

[ 0012]

The analysis samples are analyzed using the data bases obtained as above. The analysis samples are collected from the production process steps. For analyzing these analysis samples and, in particular, for discriminating as to whether or not they are rated product, absorbance spectra are taken for an analysis range, which are compared with the data base. Here, deviations (analysis deviations) of the intensities of absorbance spectra (analysis intensities) of the analysis samples from the standard average intensity are determined. Here, the discrimination is effected as to whether the analysis deviation is within a tolerance limit determined based on the standard deviation ( $\sigma$ ) stored in the data base (for example, a value of  $\sigma$ ,  $2\sigma$  or  $3\sigma$ ) or not, wherein the case of being within the tolerance limit can be judged as rated and the case of being outside can be judged as extra-rated.

[ 0013]

It is permissible to collect and analyze only one single analysis sample or a plurality of analysis samples. In the case of the latter, the comparison with the data base may be performed each individually

---

or by determining an average intensity for each of the selected wave lengths and comparing this with the standard average intensity. In case where the standard average intensity and standard deviations are determined for the standard samples for differentiation-treated absorbance spectra and are recorded in the data base, the comparison is made for the intensities of differentiation-treated absorbance spectra (including second order differentiation-treated ones) also for the analysis samples.

[ 0014]

When the intensities of the absorbance spectra of the analysis samples are compared with the data base, the product can be judged as rated if the analysis deviation of the absorbance spectrum in an estimation range included in the analysis range is within the tolerance limit, for example,  $3\sigma$ , and be judged as extra-rated if it is outside the tolerance limit. While the estimation range may be identical with the analysis range, it may be a part thereof. For example, it is possible that the estimation may be effected only in the near-infrared region even if the absorbance spectrum is taken over the analysis range ranging from a visible light region to the near-infrared region, by omitting the visible light region from the estimation. The practical manner of estimation in the estimation region may be decided voluntarily. The manner of estimation can be decided in accordance with each specific purpose of the analysis. For example, it is possible to judge as extra-rated when even one single



---

analysis result of outside of the tolerance limit occurs for specific wave lengths or to judge as extra-rated when occurrence of outside of the tolerance limit in examination of a plurality of analysis samples reaches a predetermined proportion or higher. The judgement whether the result is within the tolerance limit or not may be made simply by comparing the intensity of the absorbance spectrum with the tolerance limit individually, while the judgement may be made by determining values equivalent to the deviation and so on and comparing them with the data base.

[ 0015]

Since the absorption peaks of absorbance spectrum represent informations for, for example, composition of the analysis sample, material properties and so on, control of the production process can be realized so as to obtain the final product within the tolerance limit, if one or more wave lengths showing the extraneous intensity (analysis deviation) are present, by comparing such wave length(s) with the production information(s) recorded in the data base to obtain control data and inputting this control data to the production process step. For example, when such wave length for the extraneous intensity concerns a specific component, this means that the component is present in an amount either in excess or in short of the standard amount. Therefore, control of the production process can be realized here by decreasing or increasing the amount of this component by inputting a control data therefor to the production process step

---

so as to obtain the absorbance spectrum within the tolerance limit. When an unnecessary by-product is formed in an amount exceeding the tolerance limit therefor, a control data for attaining such a condition that no such by-product is formed may be obtained, in order to be inputted to the production process step. Concerning the material properties of the production product and other conditions, similar practice may be applied.

[ 0016]

The production informations as described above are stored preliminarily in the computer as a data base. The absorption peaks of the near-infrared absorbance spectrum represent the informations for the production process conditions, such as the composition, material properties and so on. The absorbance spectrum represents various conditions compositively, in which certain conditions, for example, the informations for a specific component and for others, are also represented by a combination of a plurality of absorption peaks. If the control data are recorded in the data base for the wave lengths at these absorption peaks, it is made possible, in the case where an analysis sample shows abnormal peaks outside the tolerance limit, to discriminate which condition or conditions is or are the origin of such abnormality, by comparing the wave lengths at such abnormal peaks with the data base. When, in this case, a control data for regaining the normal condition is inputted together with the discriminated production condition, the production

process can be turned back to the normal operation by inputting the control data as such into the production process step.

[ 0017]

In the near-infrared absorptiometric analysis and the method for controlling production processes described above, it is not necessary to prepare a calibration curve for each element for the analysis and the control of, for example, constituent components, material properties and so on, of each analysis sample and to carry out quantitative analysis thereof but is able to judge whether the product is rated or extra-rated, by simply discriminating as to whether the absorbance spectral intensities at selected wave lengths in the analysis range are within or without the tolerance limit by comparing the absorbance spectra at the selected wave lengths with the data base, whereby it is made possible to regain the normal operation of the production process by performing control of the process using the results obtained. Here, the operation for effecting the control of the process or of the analysis is simplified, since any quantitative estimation of the constituent components and of the material properties can be dispensed with. The accuracy of analysis is increased and correction of the calibration curve is unnecessary, since no calibration curve requiring accuracy is used. By using as the standard samples those which have been approved to be rated by conventional chemical analysis, the analysis accuracy can be increased. While supplement of the

data bases may be excluded, construction of the data base from more standard samples may facilitate increase in the analysis accuracy.

[ 0018]

[ INVENTIVE EFFECTS ]

By the near-infrared absorptiometric analysis according to the present invention, the analysis can be attained at a high accuracy by a simple procedure without necessitating to use any calibration curve, since the average value of the near-infrared absorbance intensities and the standard deviations of the standard samples at selected wave lengths are recorded in the data base and the absorbance spectra of the analysis samples are compared with the data base.

By the method for controlling production process according to the present invention, control of the production process can be realized based on the analytical results obtained as above, by a simple operation in a better accuracy.

[ 0019]

[ MODE FOR EMBODYING THE INVENTION]

Below, the present invention is described in more detail by way of embodiments with reference to appended drawings.

Fig. 1 is a flow chart explaining an embodiment of the of near-infrared absorption analysis and the method for controlling production process according to the present invention, wherein (A) represents the flow sequence for constructing the data base and (B) indicates the flow sequence for the analysis of the

---

product and for the process control.

[ 0020]

In constructing the data base as given in the sequence (A) of Fig. 1, inspection of the apparatus for the near-infrared absorptiometry is first carried out on the step 1. Then, on the step 2, a plurality of standard samples are observed by the near-infrared absorptiometry apparatus for a wave length range ranging from visible rays to near-infrared rays to obtain each absorption spectrum chart for each standard sample, whereupon, on the step 3, the resulting spectrum charts are stored in a computer. The computer performs data processing of the stored absorption spectrum charts on the step 4 for each of the selected wave lengths in order to determine the average standard absorbance intensity and standard deviation therefrom for each selected wave length, which are stored in the computer as data base for the process control. The construction of such data base is carried out by performing the observations for a plurality of the standard samples for each kind of the product of, for example, product brand etc., in order to store the obtained data as the data base for each kind. In the subsequent step 5, informations for the production process corresponding to the selected wave lengths are put in the data base. There may be inputted as the production informations, for example, the spectral change due to the variation of the near-infrared absorbance spectral characteristic features for the components, by-products and so on, as well as the

---

control data.

[ 0021]

In the sequence (B) for the analysis of the product and for the process control, inspection of the apparatus for the near-infrared absorptiometry is first carried out on step 11. Then, on step 12, analysis samples taken from production process steps are examined for their absorbance spectra in the analysis range, which are then compared, on step 13, with those in the data base, in order to determine each deviation (analysis deviation) from the average standard intensity. When the analysis deviation is within the tolerance limit determined based on the standard deviation stored in the data base, the run is discriminated as normal and, if the analysis deviation is outside the tolerance limit, the run is discriminated as abnormal. Here, it is possible to compare the average of the observed results with the data in the data base for the analysis samples taken from process steps either simultaneously or each isolately at an interval by taking the average of the observed values, though the absorptiometry and the comparison may be performed for each analysis sample isolately. In case where the run is discriminated in the step 14 as normal, namely, if the absorbance intensities at the selected specific wave lengths are each within the tolerance limit prescribed in the data base of, for example, three times the standard deviation  $\sigma$  of the absorbance intensity, the run is proceeded as such without any control action, as indicated in step 15.

---

[ 0022]

In case where the run is discriminated on the step 14 as abnormal, namely, if the intensities at the selected specific wave lengths are each outside the tolerance limit prescribed in the data base of, for example, three times the standard deviation  $\sigma$  of the absorbance intensity, the wave length subject to such abnormal intensity is detected on the step 16. This wave length and the production information are compared in the step 17 with those in the data base, in order to find out what the control factor is, to which the wave length is assigned, such as a component, a material property or so on. Here, the abnormal intensity is examined as to whether it is greater than or smaller than the tolerance limit, whereby, on the step 18, one or more controlling data for turning back the process step to normal run are obtained, from which one or more corresponding control signals are generated. The one or more control signals are inputted on the step 19 into the production process to actuate one or more control operations as plant actions to effect control of the operation so as to obtain a product of manufacture of a quality within the tolerance limit. Here, the control operations may be performed either all at once or in a plurality of repetitions each over a brief time or, further, in a succeeding manner. After having been turned back to normal run, the production may be continued under the revised condition as such or the condition may be turned back, in accordance with each specific controlling data.

## [ 0023]

In the above process steps, the interval of the selected wave lengths may be 10 nm or less, preferably 2 nm or less. The wave lengths of near-infrared rays ranges from 800 to 2,500 nm, so that the number of descriptive variables is calculated to be 1,700 when the interval is 1 nm, to be 850 when the interval is 2 nm and to be 170 when the interval is 10 nm. When, for example, the wave length range of 800 - 2,500 nm is divided by 2 nm, the selected wave length intervals, namely, the descriptive variables, are 850 in number. According to the present invention, the absorption spectra of plurality of standard samples at such selected wave lengths are averaged and standard deviations are calculated, from which the data base is constructed.

## [ 0024]

The construction of data base for the standard samples is performed in the following way:

《Recording of standard deviations for each wave length range in the data base》

Standard deviation:  $\sigma_i = \{(1/N-1) \sum (X_i - \mu_i)^2\}^{1/2}$

in which N : number of observations

$X_i$  : intensity at each wave length

$\mu_i$  : average intensity for N observations  
at each wave length (standard average  
intensity)

$\sigma_i$  : standard deviation at each wave  
length

(  $\sigma_i$  and  $\mu_i$  for each wave length are



recorded in the data base)

$\sigma_1, \sigma_2, \sigma_3, \sigma_4 \dots \sigma_n$

$\mu_1, \mu_2, \mu_3, \mu_4 \dots \mu_n$

[ 0025]

The comparison of the average of observed values at each wave length of analysis samples collected from production process steps with the data base is performed in the manner as follows:

Analysis deviation:  $X_i - \mu_i$  ( $i: 1, 2, 3, \dots, n$ )

in which  $x_i$ : average intensity for N observations  
(analysis average intensity) at each  
wave length

$x_1, x_2, x_3, \dots, x_n$

$\mu_i$ : standard average intensity on the  
data base

$x_i - \mu_i$ : comparison of the analysis  
average intensity with the  
standard average intensity  
(analysis deviation)

$x_1 - \mu_1, x_2 - \mu_2, x_3 - \mu_3, \dots, x_n - \mu_n$

Quotient of  $x_i - \mu_i$  by  $\sigma_i$ :

$(x_i - \mu_i) / \sigma_i$

Comparison of analysis deviation with tolerance  
limit:

if the tolerance limit =  $\sigma$ :  $1 \geq (x_i - \mu_i) / \sigma_i$

if the tolerance limit =  $2\sigma$ :  $2 \geq (x_i - \mu_i) / \sigma_i$

if the tolerance limit =  $3\sigma$ :  $3 \geq (x_i - \mu_i) / \sigma_i$

if the tolerance limit =  $4\sigma$ :  $4 \geq (x_i - \mu_i) / \sigma_i$

[ 0026]

Atoms constituting a molecule are held under a

symmetrical stretching vibration, a non-symmetrical stretching vibration and a deformation vibration. When a light of a frequency identical with that of the above vibration strikes on the molecule, a part of the light is absorbed by the molecule, whereby it is excited from the ground state to an excited state. The excited atom emits lights of frequencies of harmonics of the absorbed infrared light, which can be detected in near-infrared region. Therefore, the detected near-infrared absorption wave length has a chemical attribute, so that pertinent wave lengths can be selected in accordance with the objective component. However, in practical analysis samples, there are in general few binary systems and they are present in most cases as multicomponent systems in mixtures with multicomponents or in morphic states altered by reaction or polymerization.

[ 0027]

Concerning the chemical attribute of absorption wave length, wave length ranges attributive to functional groups have been known and, based on this, the wave length ranges correponding to the characteristic functional groups of the raw materials and the reaction products are put into a data base. Examples of the wave length ranges for functional groups are recited below:

OH	1st harmonics	1345 - 1550 nm
	2nd harmonics	910 - 1033 nm
NH	1st harmonics	1415 - 1516 nm
	2nd harmonics	943 - 1010 nm

---

CH (aliphatic)	1st harmonics	1680 - 1760 nm
	2nd harmonics	1120 - 1173 nm
CH (aromatic)	1st harmonics	1615 - 1665 nm
	2nd harmonics	1077 - 1111 nm

[ 0028]

In the embodying mode given above, the spectrum chart, obtained by a near-infrared absorptiometer, of the reaction product in a reaction system is processed by differentiation-treatment, from which a second derivative curve is obtained in the wave length range of 800 - 2,500 nm. The average spectrum is compared with the average spectrum recorded in the data base to compare with the data base of functional groups for the wave lengths or wave length ranges, at or for which the standard deviation is exceeded in plus or minus level. The raw material, reaction product or so on is specified thereby and control of the plant is effected via a computer so as to maintain it within the definite standard deviation.

[ 0029]

It has been known that the absorbance of spectrum obtained by near-infrared observation suffers from shifting of the baseline due to external condition of, for example, temperature, water content, flow velocity and so on. This means that the absorbance value may be varied by such baseline shifting (alteraion in the absorbance) when the originally obtained spectrum is used as such, whereby considerable influence on the observation results should be taken into account. Such an influence of the baseline

---

shifting can be suppressed by processing the original spectrum chart by differentiating it, whereby a steady spectral absorption intensity can be obtained.

[ 0030]

When an absorption spectrum chart is processed by differentiating it, high frequency noises are amplified (emphasized) and may participate in the control action erroneously as if they represent near-infrared informations. Therefore, it is essential for the requisite performance of a near-infrared absorptiometer that the noise level should be at the highest  $50 \times 10^{-6}$  absorbance units.

[ 0031]

Sigma discrimination method is a technique for discriminating as to whether or not a product on production corresponds to a previously obtained rated brand product, wherein identical quality product can be sorted statistically within a deviation of  $3\sigma$  at a probability of 99.7 %. Here, 20 to 30 samples of differentiation curves of the near-infrared absorption spectrum charts of each brand approved to be rated product are selected for constructing the data base, with which that of the process product on production is compared. If the deviation exceeds the range of  $3\sigma$ , namely, three times the standard deviation ( $\sigma$ ) of the standard spectrum used as the base, in the wave length range of 800 - 2,500 nm, the process product is judged as being extra-rated.

[ 0032]

In the above process control, near-infrared

spectral charts obtained at a constant interval are inputted in a near-infrared system constituted of a near-infrared absorptiometer, a computer for controlling the near-infrared absorptiometer and a data analyzing computer, under differentiation of the spectral charts directly in the data analyzing computer or via the controlling computer, whereupon the quantitative analysis value and the  $3\sigma$  value are displayed simultaneously or solely for each of them on a CRT.

[ 0033]

[ EMBODIMENT]

Below, the present invention will be described by way of Example.

EXAMPLE 1

EXAMPLE 1 describes an embodiment of controlling production process of a polyolefin resin.

Fig. 2 shows a near-infrared absorption spectrum chart of a standard sample of a product judged as a rated product by conventional chemical analysis, in which the curve (A) represents the original absorption spectrum chart and the curve (B) represents second derivative curve in which the original spectral chart is doubly differentiated. The second derivative curve exhibits flattened and isolately appearing emphasized absorption peaks. Fig. 3 shows the fluctuation width of the second derivative curves of the spectrum charts observed for a plurality of standard samples (20 samples in this EXAMPLE). Fig. 4 shows second derivative curves for a plurality of

analysis samples (3 samples) collected from production process steps, in which a data base is constructed by data-processing the second derivative curves obtained in Figs. 1 and 2 to produce the average intensity for selected wave lengths selected at an interval of 2 nm and standard deviations thereof, whereupon the horizontal line of level 0.000 is settled at the average intensity level and the horizontal lines of levels  $\pm 3.000$  are settled at the levels three times standard deviation  $\sigma$ , namely  $3\sigma$ . Fig. 4 corresponds to the case where the production process is in normal operation, wherein all the peaks in the range of 800 - 2,500 nm for the analysis samples lie within the range of  $3\sigma$ , namely, they are within the tolerance limit.

[ 0034]

Fig. 5 indicates the case of operation where abnormal values appear and shows the second derivative curves for the analysis samples collected from production process steps similar to those of Fig. 4. Figs. 6, 7 and 8 show each the second derivative curve of the spectrum chart for the raw material (A), raw material (B) and raw material (C), respectively, which are each put in a data base as production informations. When comparing the spectrum of Fig. 5 with respect to the peaks at 1726 nm and 2303 nm, at which the values exceed  $3\sigma$ , with the data base of production information, they coincide with those of component (B) of Fig. 7, indicating that the component (B) is present in excess. Therefore, a control signal for decreasing the amount of component (B) was given off, whereby the

production process was turned back to normal operation. When the peaks exceeding  $3\sigma$  were originated from an impurity, the control was able to be realized by emitting a signal for diminishing such impurity.

[ BRIEF DESCRIPTION OF THE DRAWING]

[ Figure 1]

This is a flow diagram for one embodiment of the method of near-infrared absorption analysis and the method for controlling the production processes.

[ Figure 2]

This is a near-infrared absorption spectrum chart for a standard sample in EXAMPLE 1.

[ Figure 3]

This shows the second derivative curves for standard samples of EXAMPLE 1.

[ Figure 4]

This shows the second derivative curves for standard samples of EXAMPLE 1.

[ Figure 5]

This shows the second derivative curves for standard samples of another example.

[ Figure 6]

This shows the second derivative curve for the raw material A.

[ Figure 7]

This shows the second derivative curve for the raw material B.

[ Figure 8]

This shows the second derivative curve for the raw material C.




Tokugan 2000-244026

(1)


[ DESIGNATION OF THE DOCUMENT ]      DRAWING

[ Figure 1 ]

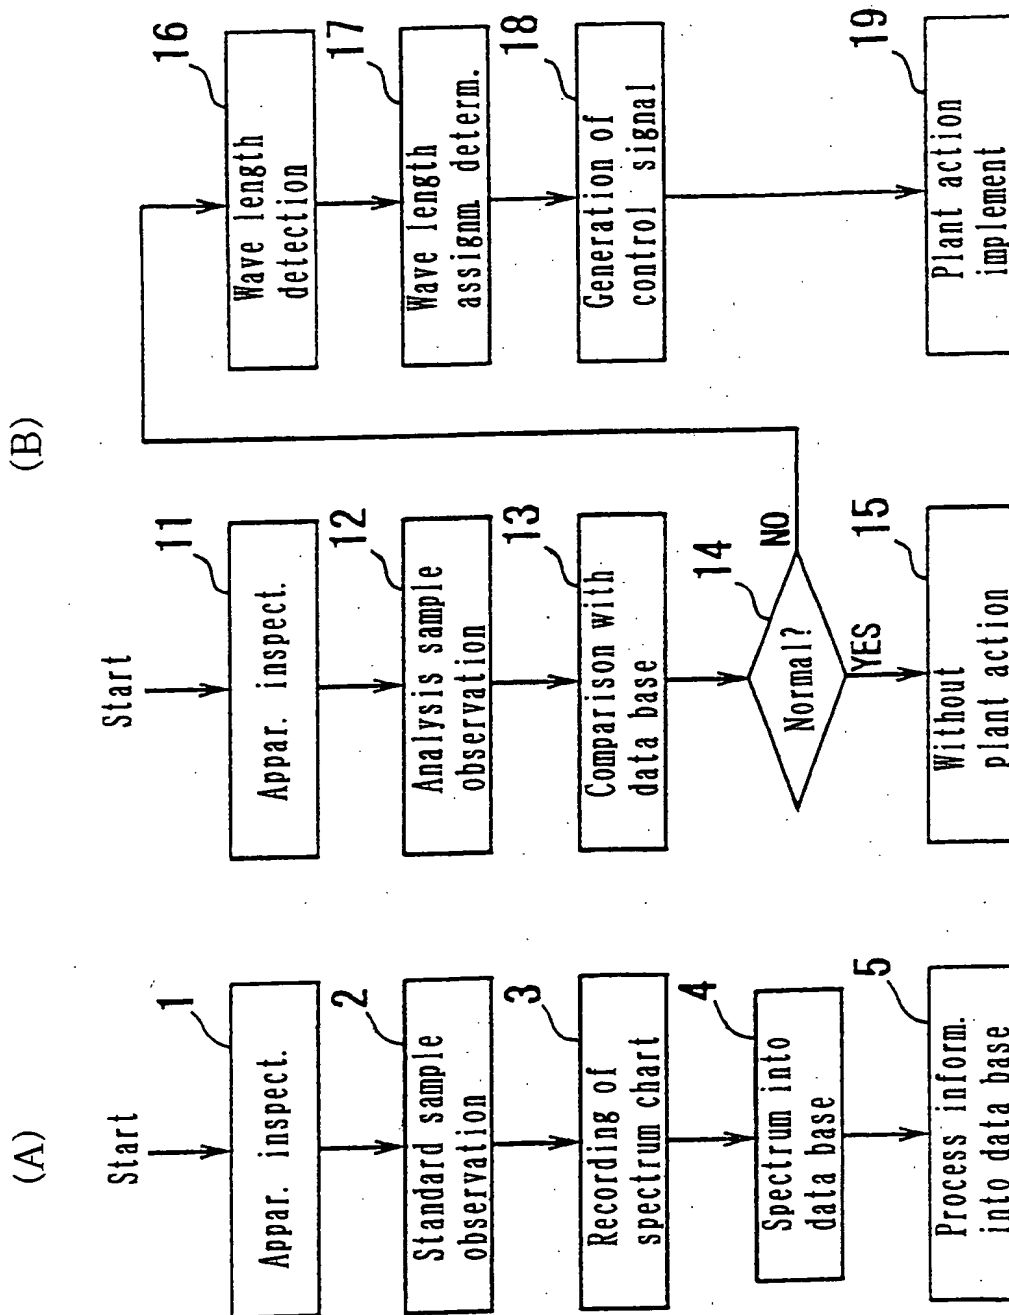





[ Figure 2 ]

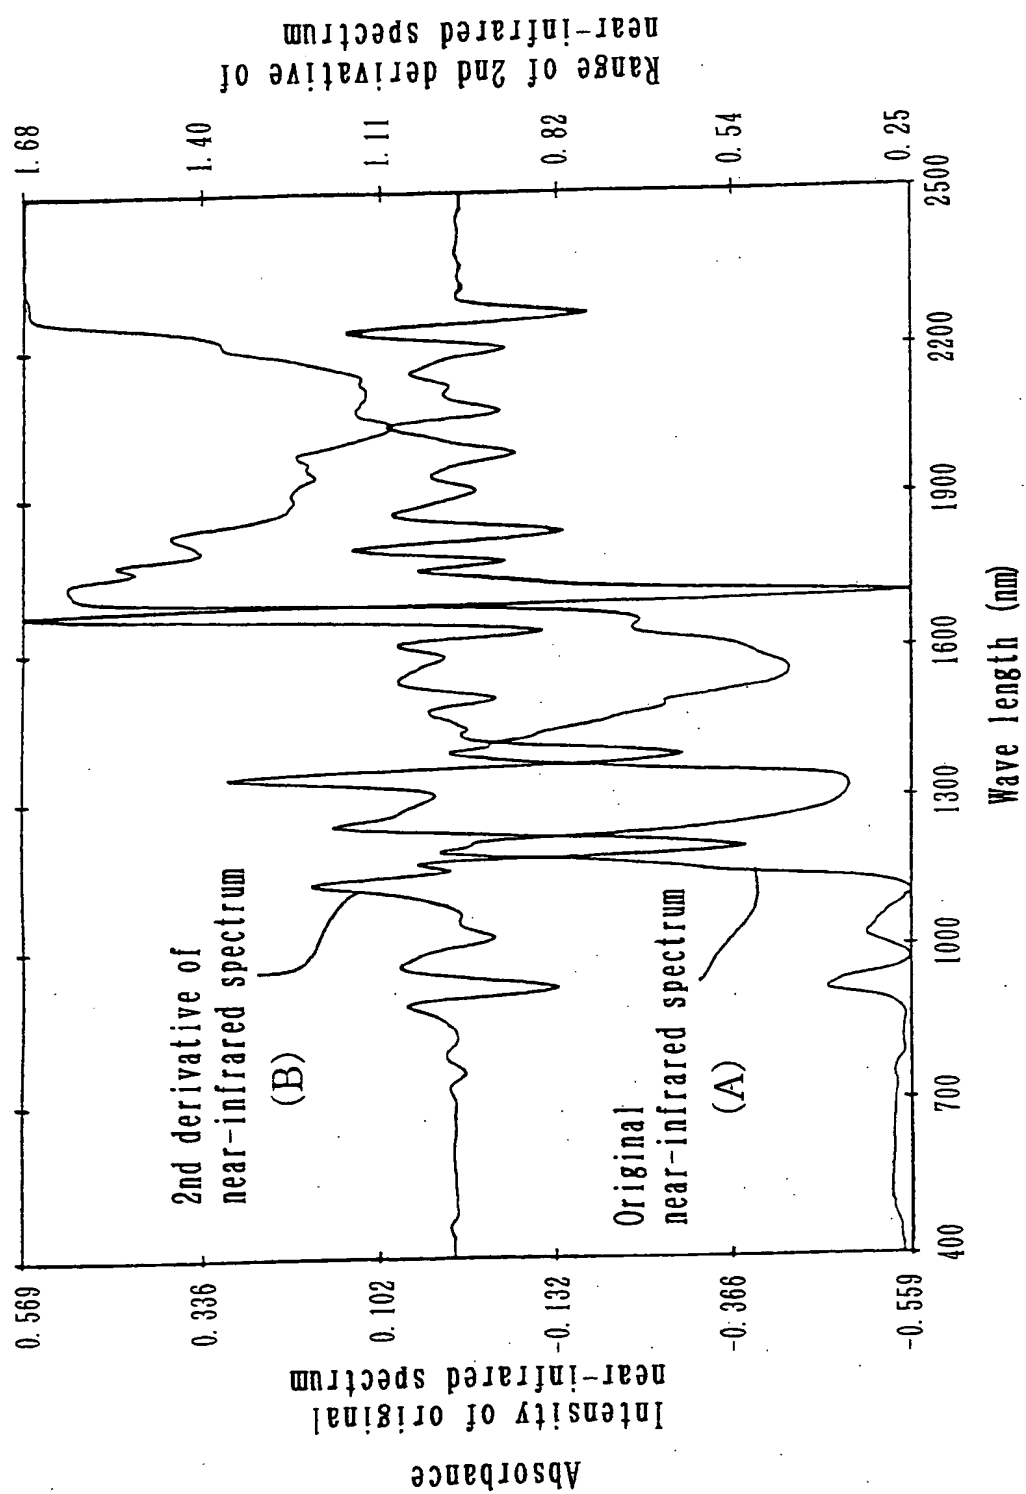


[ Figure 3 ]

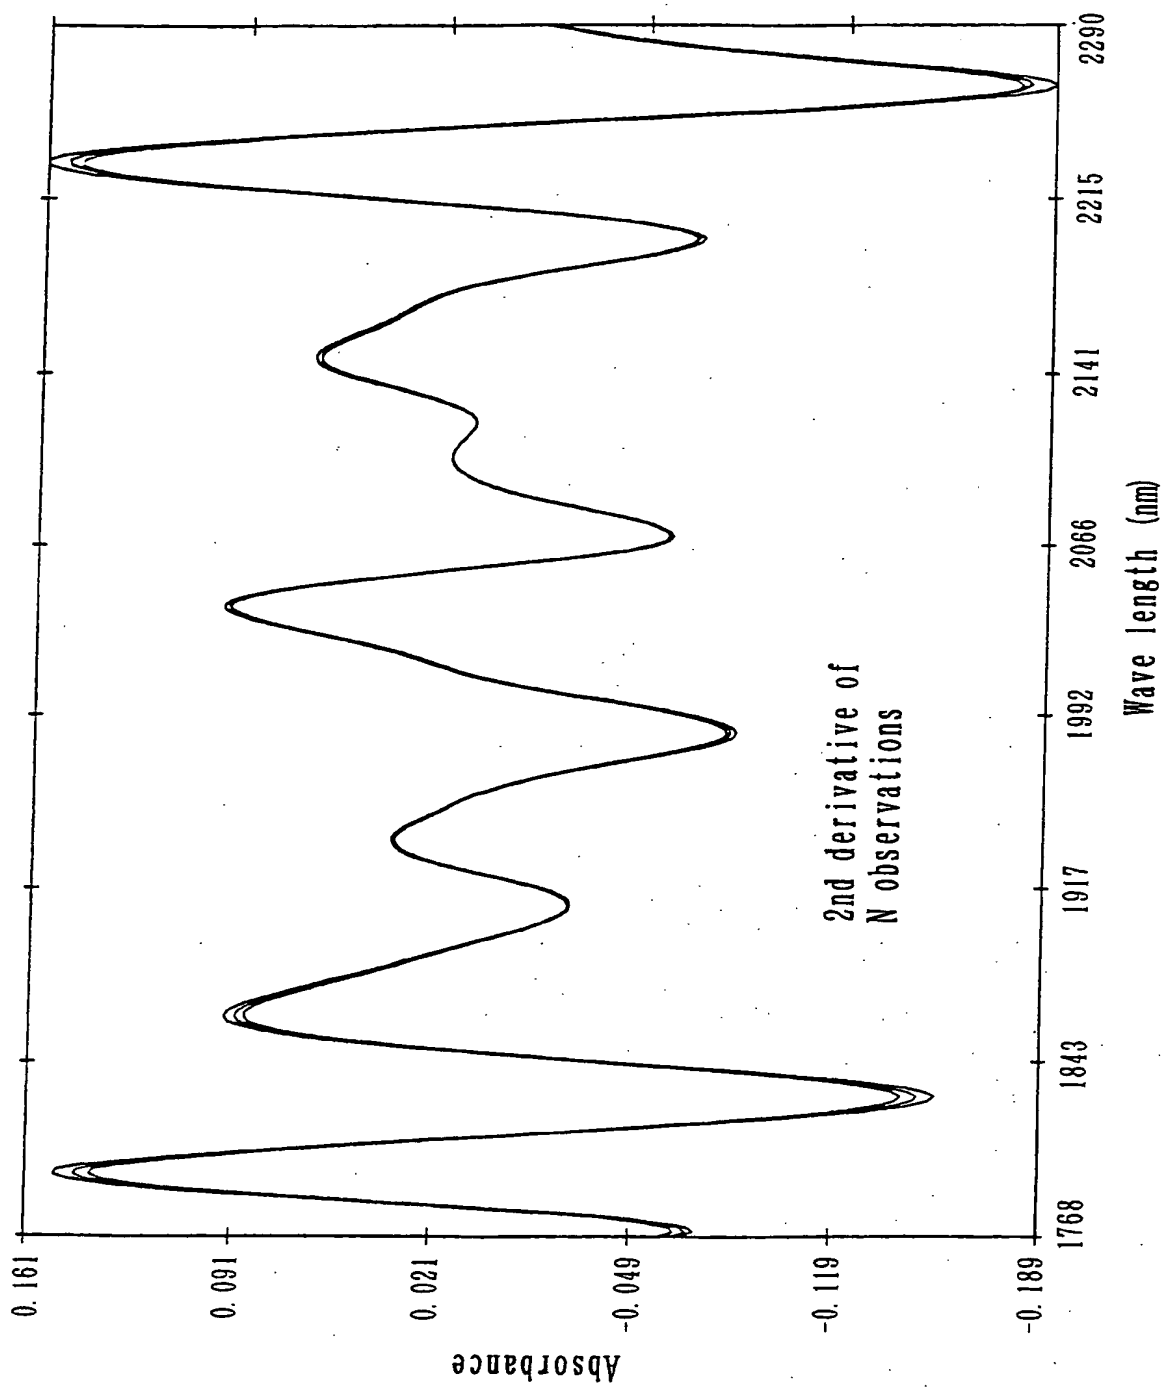


[ Figure 4 ]

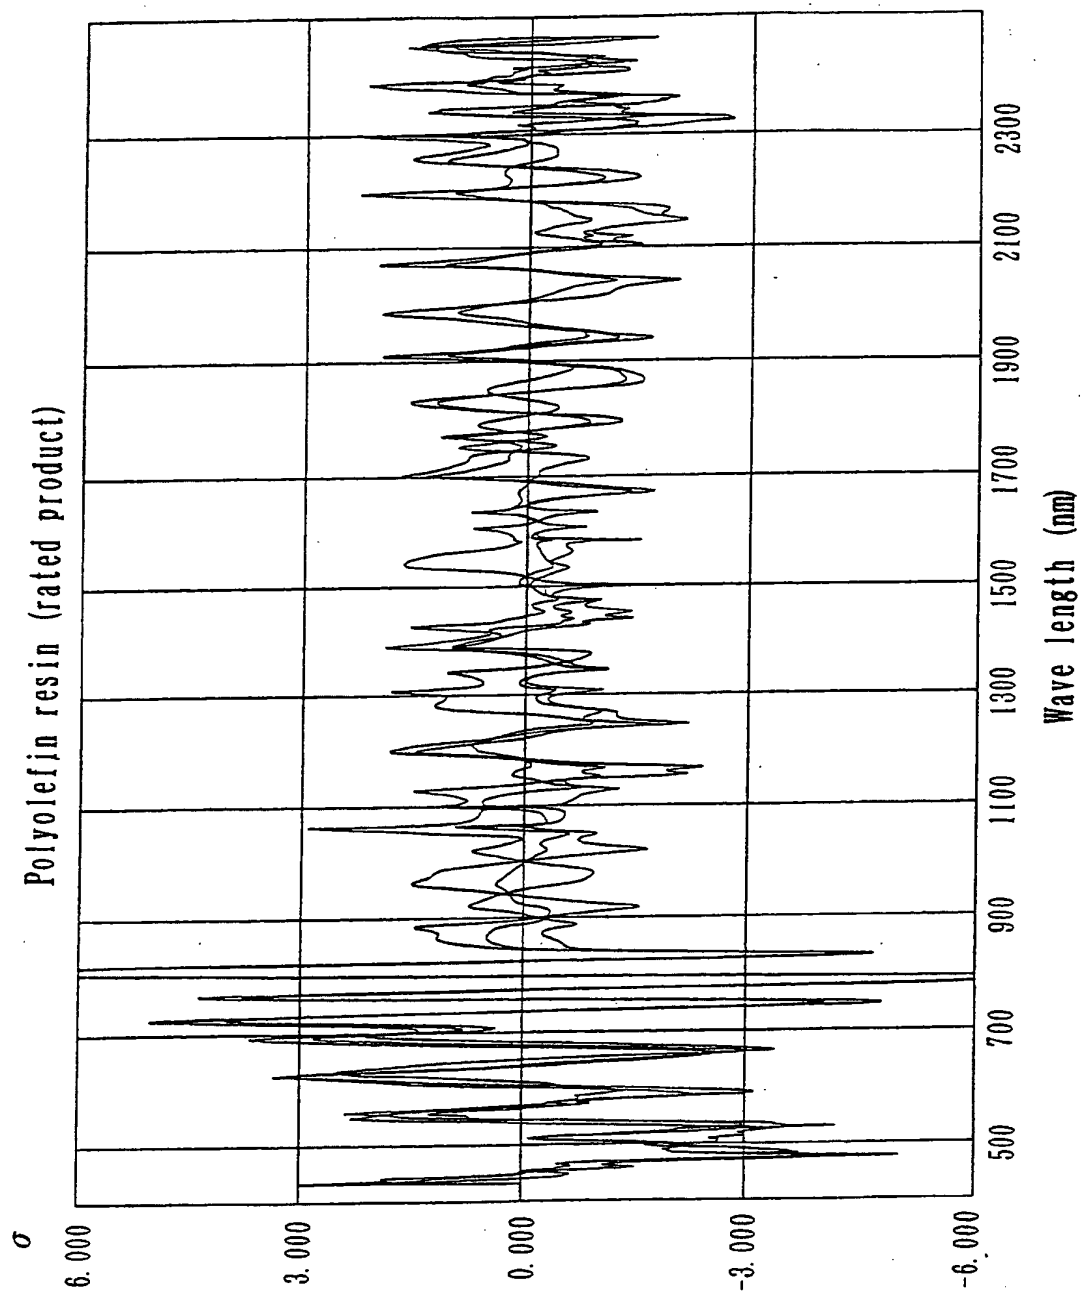


[ Figure 5 ]

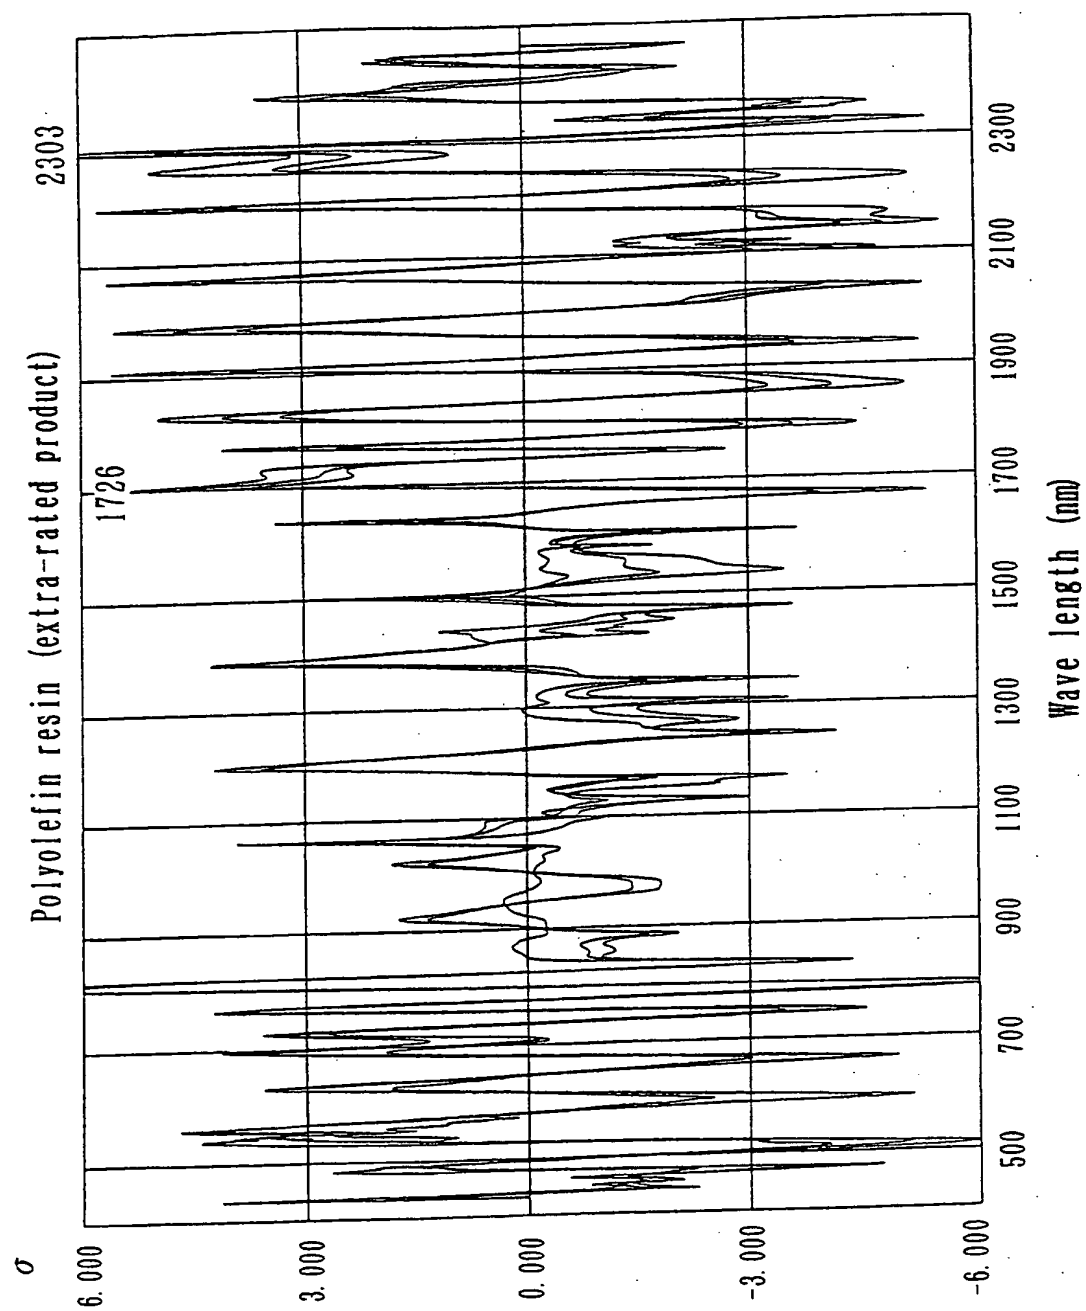


[ Figure 6 ]

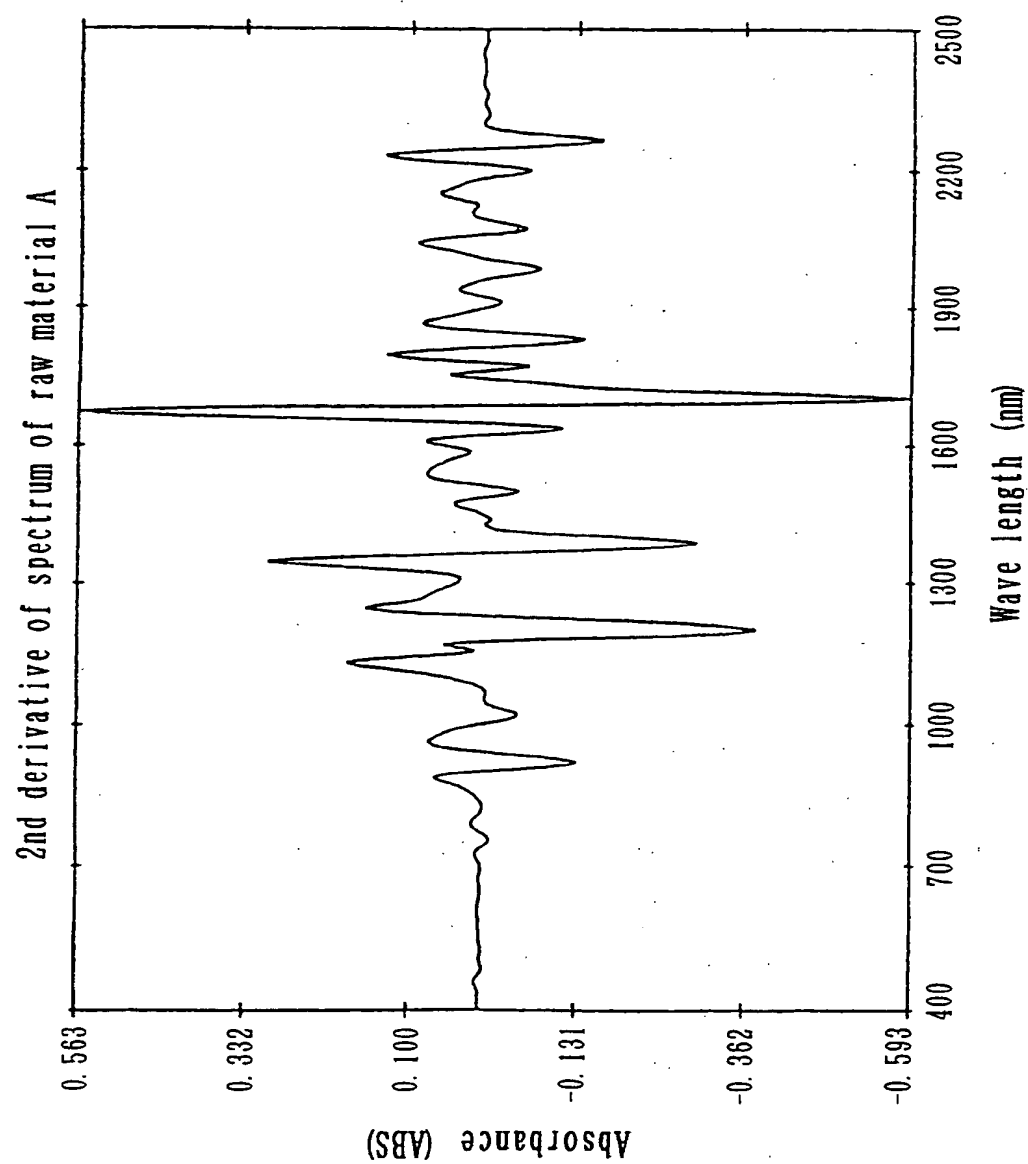


[ Figure 7 ]

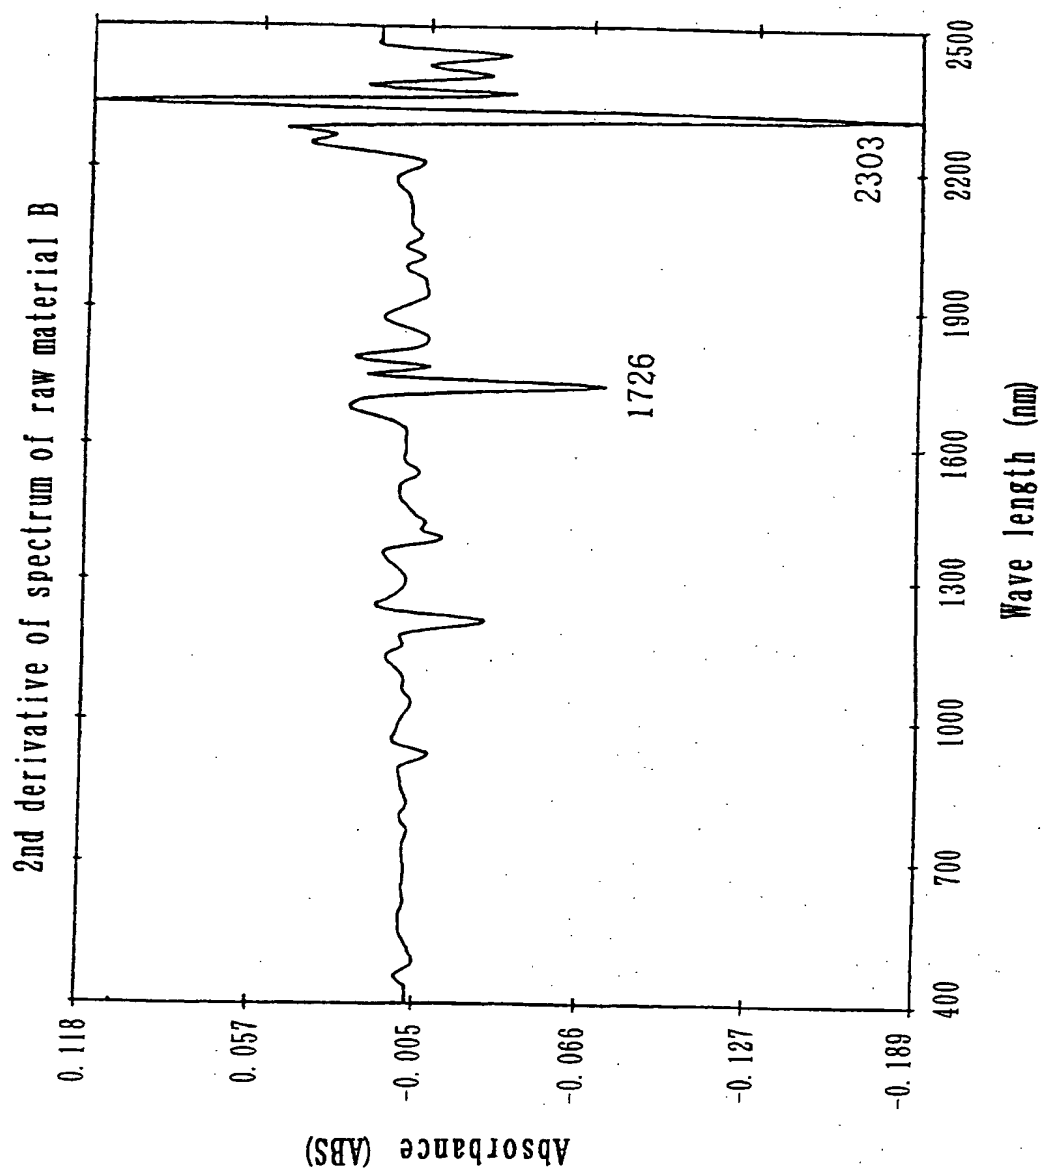

[ Figure 8 ]

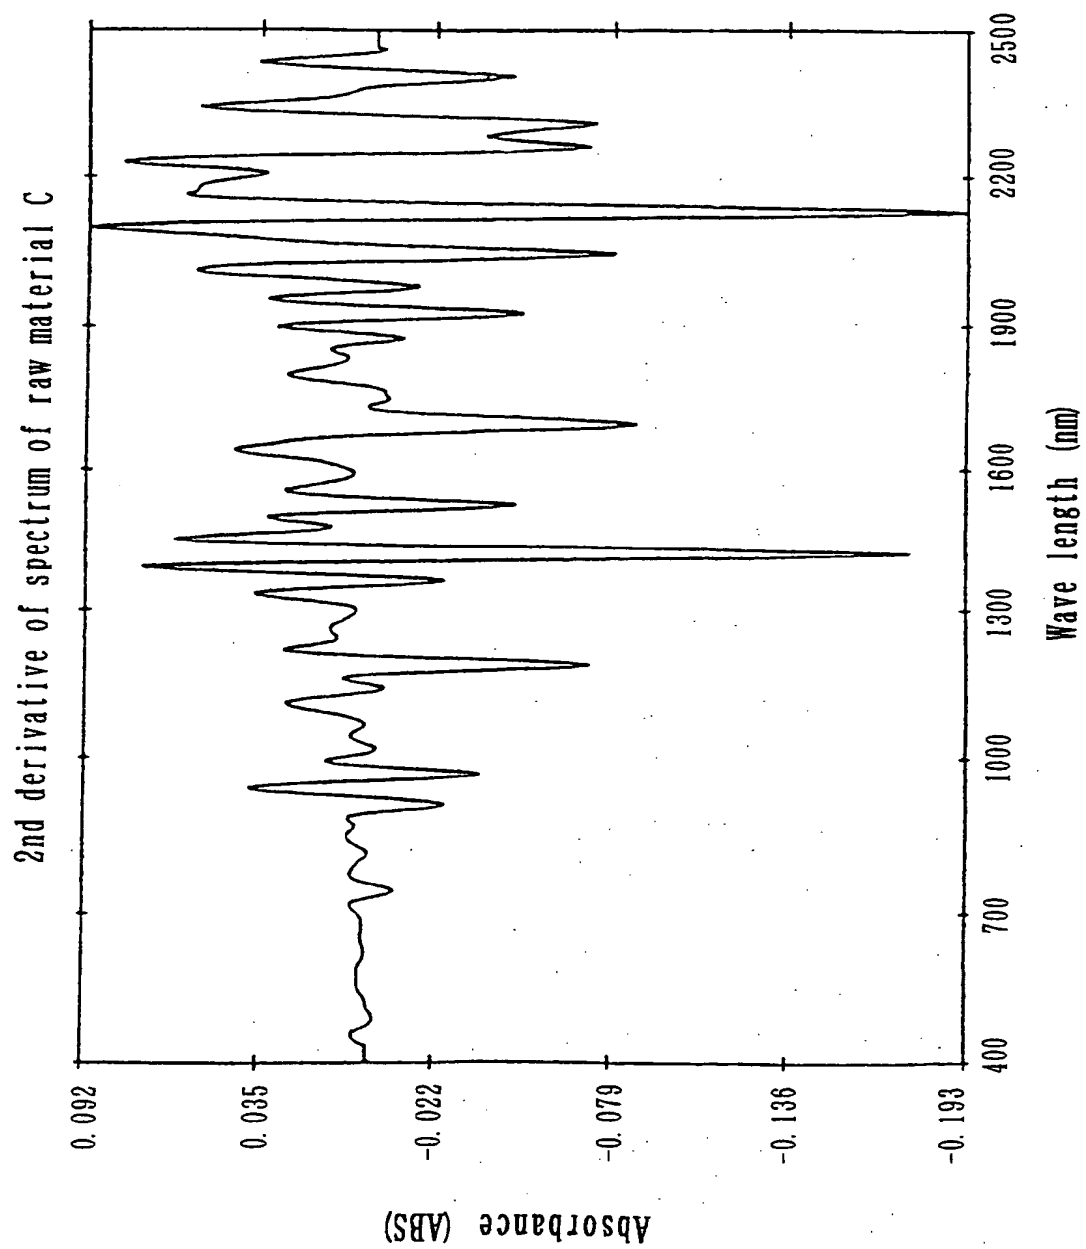



Tokugan 2000-244026

(1)

---

[ DESIGNATION OF THE DOCUMENT ]      ABSTRACT

[ ABSTRACT ]

[ SUBJECT ]      To propose a method for controlling production process by performing near-infrared absorptiometric analysis by simple procedures in an accurate manner, in which control of production process step can be realized at a high accuracy by simple operation based on the thereby obtained analytical results.

[ MEANS OF SOLUTION ]      The said method comprising taking each absorbance spectrum for a plurality of standard samples in an analysis range including near-infrared region, calculating the average intensity and standard deviations for each of selected wave lengths to construct a data base, taking an absorbance spectrum in the said analysis range for each of analysis samples and comparing it with the data base in order to judge whether or not the intensity of the absorbance spectrum is within an assumed tolerance limit determined based on the stored standard deviations of the standard samples in the data base to thereby obtain control data by comparing, when wave lengths at which the observed intensity is outside the tolerance limit are present, these extraneous wave lengths with the production information given preliminarily in the data base, these control data being inputted in the production process step, so as to obtain production product within the above tolerance limit.

[ SELECTIVE DRAWING ]      Fig. 1